


# Fusor\_NO\_Ions

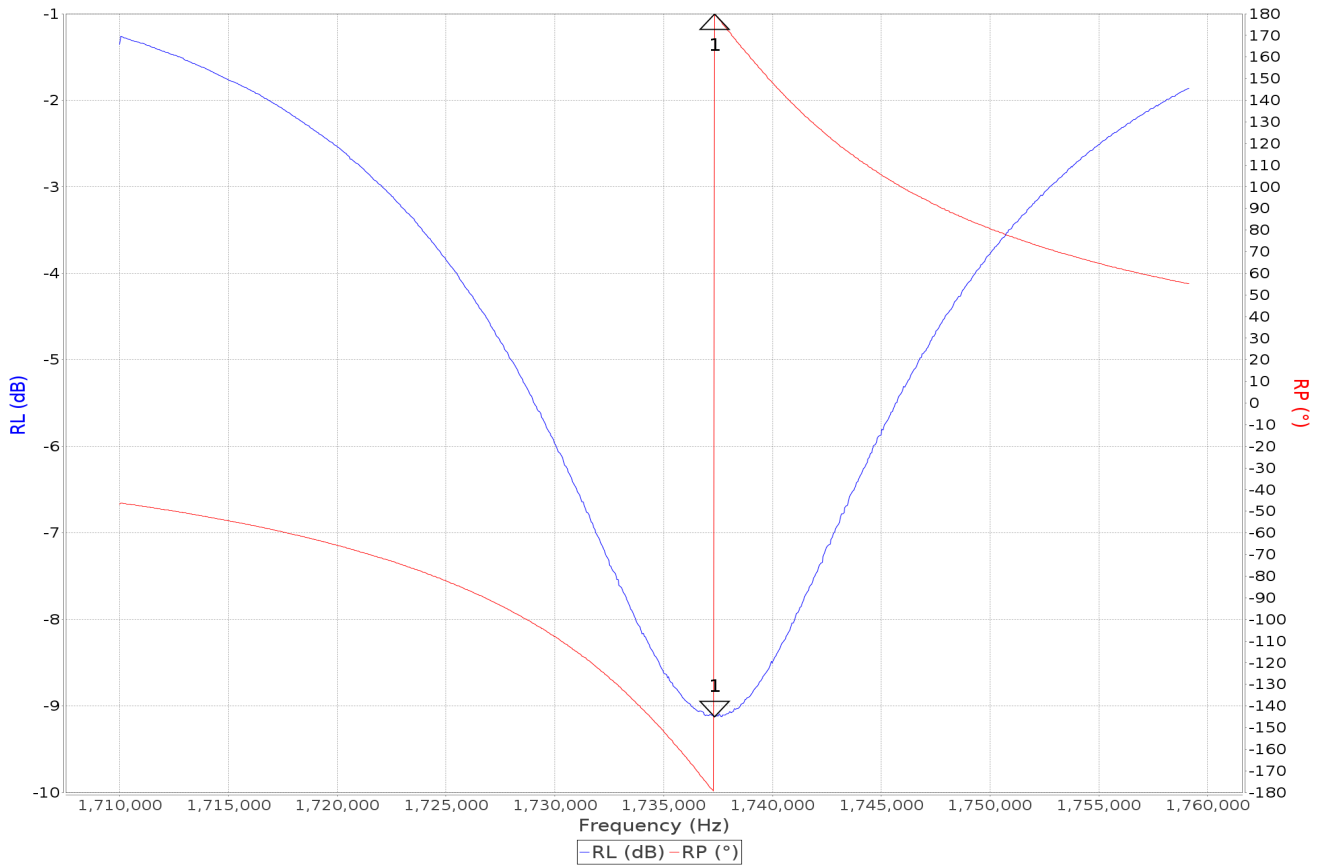

| Marker | Freq. (Hz) | RL (dB) | RP (°) | Z  (Ω) | Rs (Ω) | Xs (Ω) | Theta | SWR    |
|--------|------------|---------|--------|--------|--------|--------|-------|--------|
| 1      | 1,737,348  | -9.13   | 179.92 | 24.1   | 24.1   | 0.0    | 0.1   | 2.08:1 |

## Comment:

Date: 6/23/18 2:47 PM  
 Mode: Reflection  
 Analyser: miniVNA-pro / VNA - miniVNA pro  
 Scan  
   Start: 1710000 / 1,710,000  
   Stop: 1759184 / 1,759,184  
   Samples: 928  
   Overscan: 1  
 Calibration  
   Samples: 28000  
   Overscan: 0  
   File: REFL\_miniVNA-pro.cal  
 User: doug  
 Headline: Fusor\_NO\_Ions  
 Port extension len: <not set>m  
 Port extension vf: <not set>

